


D129 Dual Class A Initiating Circuit Module

www.boschsecurity.com



BOSCH
Invented for life

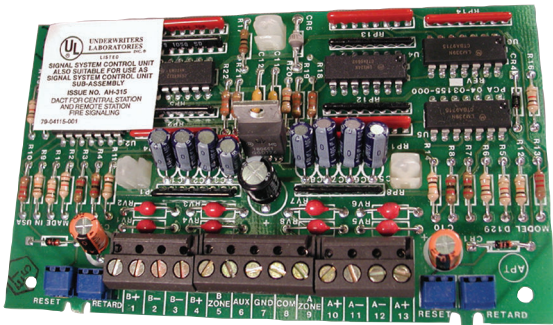

- ▶ Adjustable alarm and reset delays
- ▶ Provides two supervised Class A (Style D) loops
- ▶ Reliable terminal connections
- ▶ Suitable for waterflow switches
- ▶ Compensates for sprinkler alarm valve fanning

The D129 Dual Class A Initiating Circuit Module is a fire system interface for compatible Bosch Fire Alarm Control Panels. The D129 Module has two NFPA Class A (Style D) circuits suitable for use with retarded and non-retarded sprinkler waterflow switches. Each circuit has screwdriver-adjustable potentiometers for alarm retard and alarm reset delay. Separate alarm and retard delay potentiometers for each loop allows connecting different types of initiating devices on one module. Adjust the delay periods to compensate for sprinkler flow valve fanning. Multi-family occupancies, office buildings, and institutional facilities are typical installations where either or both sprinkler and mechanically-actuated devices are required.

Functions

Style D Circuits

The Style D circuit is a four-wire loop with a feed and return for both the positive and negative sides of the loops. Unlike two-wire loops supervised by end-of-line resistance, Style D circuits can detect alarm conditions even though there is a single open or ground fault in the circuit.

Loop inputs on the D129 module which are not used are terminated with jumpers so they appear as normal loops to the control panel.

Waterflow Alarm

When using non-retarded waterflow switches on a wet pipe sprinkler system, the D129 module can provide each set of loop inputs with an alarm retard period to compensate for water pressure surges. The maximum retard time is approximately 90 seconds.



Notice

Use the alarm retard only for wet pipe sprinkler systems using non-retarded waterflow switches.

Certifications and approvals

Region	Certification	
USA	UL	UOJZ: Control Units, System (UL864, 9th edition)
	CSFM	see our website
	FDNY-CoA	#6174 UL 864 9th Edition
	NYC-MEA	12-92-E, Vol. 12 12-92-E, Vol. 12
	NYC-MEA	12-92-E, Vol. XV

Installation/configuration notes

Compatible Products

The following Bosch control panels are compatible with the module:

Active products:

GV4¹, GV3², and GV2³ panels

Legacy*

D9412G, D7412G, D7212G**, D9412, D7412, D7212** and D7212B1** panels

D9112B1 and D9112 panels

D8112 panel

D7112 panel

¹ GV4 = D9412GV4, D7412GV4, and D7212GV4** panels

² GV3 = D9412GV3, D7412GV3, and D7212GV3** panels

³ GV2 = D9412GV2, D7412GV2, and D7212GV2** panels

* Legacy products were investigated to comply only to UL864 8th edition

** indicates products which are not UL listed for commercial fire applications

Mounting

The D129 module mounts in a Bosch control panel enclosure or in an adjacent approved enclosure. Auxiliary enclosures must be connected to the control panel enclosure by metal conduit not more than 20 ft (6 m) long. A D137 Mounting Bracket is optional.

Wiring

The initiating device circuits wire directly to the D129 module using the on-board terminal connections. When both Style D loops are being used, connect the module to the appropriate control panel with five separate conductors. Only four conductors are required if using only one of the Style D loops.

Parts included

Quant.	Component
1	Initiating circuit module
1	Hardware pack
1	Literature pack

Technical specifications

Mechanical Properties

Dimensions (HxWxD):	5 in. x 3 in. x 0.75 in. (12.7 cm x 7.6 cm x 1.9 cm)
---------------------	---

Power Requirements

Current (alarm):	25 mA maximum
Current (standby):	23 mA maximum
Voltage:	12 VDC nominal

Ordering information

D129 Dual Class A Initiating Circuit Module

The D129 Dual Class A Initiating Circuit module is a fire system interface for fire alarm and water-flow alarm applications, the module has two Class A (Style D) circuits, each with a screwdriver adjustable Alarm Retard and Alarm Reset Delay.

Order number **D129**

Accessories

D137 Mounting Bracket

Used to mount accessory modules in D8103, D8108A, and D8109 enclosures.

Order number **D137**

Represented by:

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com